
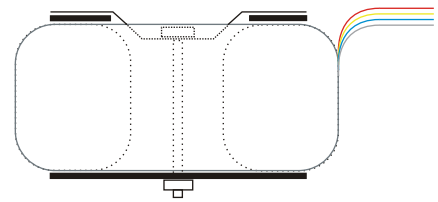
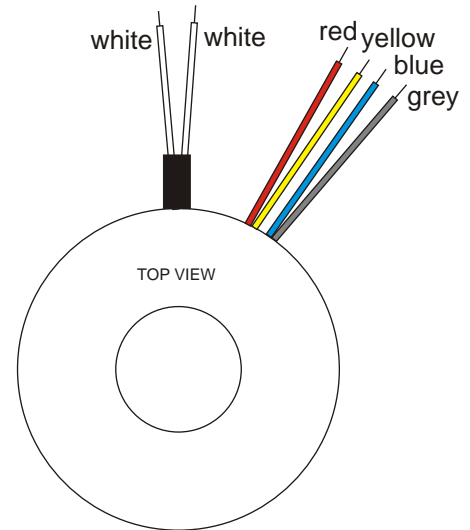
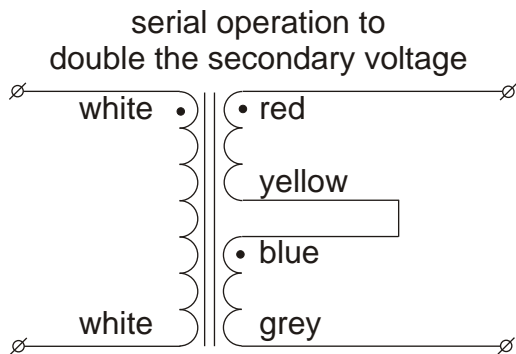
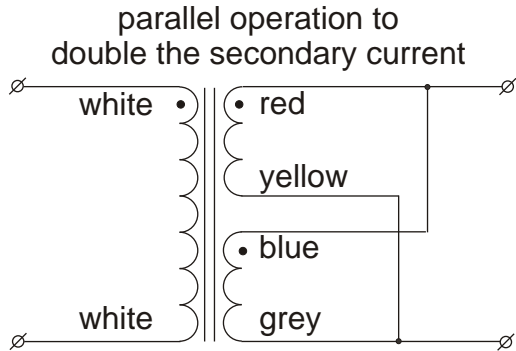


Toroidal transformer type 280xx

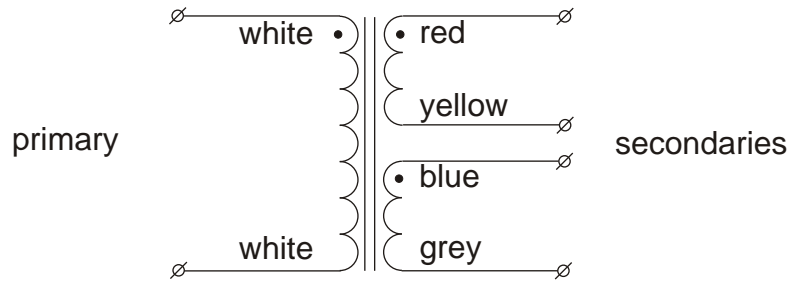

Diameter 80mm
 Height 39mm
 Weight 0.74kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø70mm
 2 neoprene washers Ø70mm
 1 bolt M5x50mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.
 Primary: 0.25A, 5x20mm, IEC127, high I²t value
 Secondary: none

Type number	primary	secondaries	
		voltage	current
28010	230V	2x 6V	4.17A
28011	230V	2x 9V	2.77A
28012	230V	2x 12V	2.08A
28013	230V	2x 15V	1.66A
28014	230V	2x 18V	1.39A
28015	230V	2x 22V	1.13A
28016	230V	2x 25V	1.00A
28017	230V	2x 30V	0.83A
28070	230V	2x 115V	0.22A

All voltages are under full ohmic load.
 Regulation : 12%



Vossenbrinkweg 1
 NL-7491DA DELDEN
 The Netherlands

P O - B o x 2 4
 NL-7490AA DELDEN
 The Netherlands
 Tel.+31 (0)74 376 3765
 Fax+31 (0)74 376 3132

info@amplimo.nl
 http://www.amplimo.nl

HB

April 2003

© Copyright Amplimo BV

280xx

**toroidal transformer
 range 50VA**